



product range





















COMPANY WITH SAFETY SYSTEM CERTIFIED BY DNV

= OHSAS 18001=

COMPANY WITH ENVIRONMENTAL SYSTEM CERTIFIED BY DNV

=ISO 14001=

COMPANY WITH QUALITY SYSTEM CERTIFIED BY DNV

= ISO 9001 =

Sewage electric pumps according to explosion proof ATEX II 2G Exd IIB T4



at the service of Man and the environment since 1945





The Caprari group is a leading manufacturer on an international level in the production of centrifugal pumps and electric pumps and in the creation of advanced solutions for management of the integrated water cycle.


Founded in 1945 by Amadio Caprari, the company has continually expanded and diversified its business, to respond with innovative products and services to the specific and changing needs of the world of water with a view to an increasingly closer and more specialized partnership with its cu-singly customers.

Thanks to its exclusive and diversified know-how, the finest and most efficient solutions for the main water requirements are now supplied: deep well pumping, waste and drainage water lifting, residential, industrial and agricultural water supply and distribution, and water treatment in general.


passion for technology

From hydraulic design using proprietary integrated programmes to complex structural analysis; from the conception of an innovative solution to severe testing in the field; from selecting the finest materials available to using the most sophisticated production technologies, the experience of many decades is combined with a daily passion.

Products with many versions to fully satisfy every specific system or use, easy installation, high efficiency and simple and cost-effective maintenance produce the best "Life Cycle Cost": the maximum efficiency of use, over the long term, so that technology gives a tangible result for people and their environment.













Water Collection and Distribution





Boosting and Distribution of surface water





Wastewater Transport and Treatment





Pump Control Technology










E4XP Cnergy

Electric stainless radial borehole pumps

High-efficiency multistage electric borehole pumps available in a wide range so as to perfectly suit whatever duty point may be required. Compact and stainless, they combine power and reliability owing to their pioneering type of construction (two exclusive patents) and the quality of the materials used to make them. They are designed to withstand galvanic corrosion thanks to the DEFENDER® passivating system. The EASY-CHECK disassembly system allows them to be easily serviced.

Machines conform to 2009/125/EC Directive (EcoDesign - ErP).

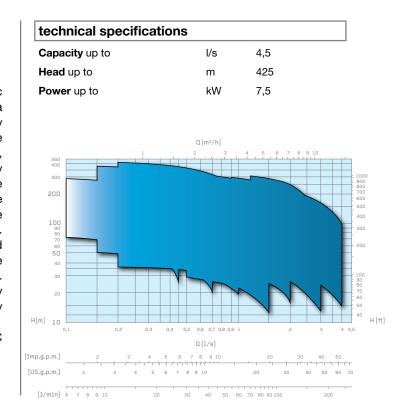






Electric stainless radial borehole pumps

The right choice for high concentrations of solids and sand up to 300 g/m³.

The new 4" and 6" borehole pumps for small and medium-size wells are Caprari's answer to the need for high performance plus long life in extremely heavy duty conditions. Compact and stainless, they combine power and reliability thanks to their pioneering type of construction and the quality of the materials used to make them. Machines conform to 2009/125/EC Directive (EcoDesign - ErP).

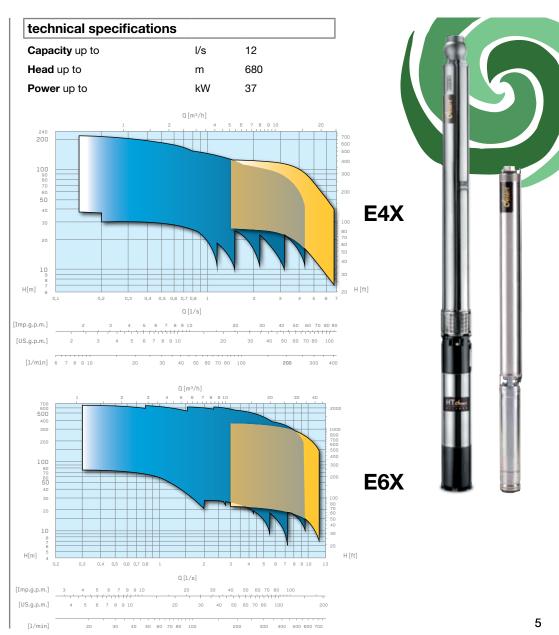

E6VX

Electric stainless radial borehole pumps

The E6VX series electric borehole pumps in stamped and welded stainless steel cover the segment of the market who requires stainless steel but not for aggressive and critical environments.

Regarding to our competitors' pumps, the E6VX series is the only one with a canned construction to be equipped with DEFENDER® protector, which is covered by a Caprari international patent: the result is a sturdier construction as well as greater resistance to electrochemical corrosion and galvanic currents thanks to the passivating effect that DEFENDER® has on the stainless steel. DEFENDER® has been installed right to make the product longer lasting and distinguishes it from the competitors' product manufactured with a similar construction technology.

Machines conform to 2009/125/EC Directive (EcoDesign - ErP).

technical specifications Capacity up to I/s 9 Head up to m 400 Power up to kW 30

ESX - ERX

Stainless steel electric mixed flow and radial borehole pumps

ENDURANCE: electric mixed flow and radial borehole pumps made entirely of microcast stainless steel, including impellers and diffusers. Designed to ensure top performance in any aggressive environment, even marine. They combine compact dimensions with high performance. They are Caprari's professional response to the most heavy-duty use and most difficult working conditions.

A great step forward in terms of reliability and performance compared to constructions of pressed - welded steel plate.

Machines conform to 2009/125/EC Directive (EcoDesign - ErP).

technical specifications Capacity up to l/s 50 850 Head up to m Power up to kW 170 Q [m3/h] 700 600 500 400 100 80 70 60 50 10 [Imp.g.p.m.] 50 60 70 80 100


400 500 600


50 60 70 80 100



E8R - E10R Electric radial borehole pumps

Electric 8" and 10" radial borehole pumps able to reach high heads. Thanks to the limited axial dimensions of the wet-end these machines feature a high number of stages with limited length so as to make them compact and reliable. Very solid machines, designed to last and to always ensure peak performance and efficiency under heavy duty conditions of use at great depths of installation and extremely high heads.

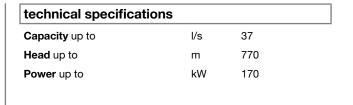

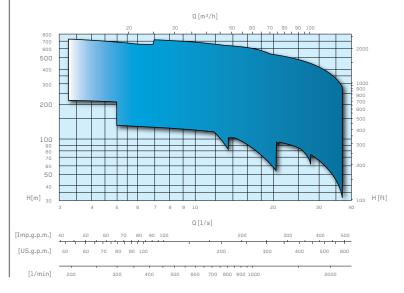




E6P - E8P Electric mixed flow borehole pumps

Thanks to a computerized design and the most sophisticated productive technologie, Caprari offers the electric borehole pumps Energy range with benchmark performances and efficiencies. The new design and the innovative patented construction solutions ensure robusteness, long life and reliability.

Machines conform to 2009/125/EC Directive (EcoDesign - ErP).

Capacity up to	l/s	48
Head up to	m	460
Power up to	kW	92

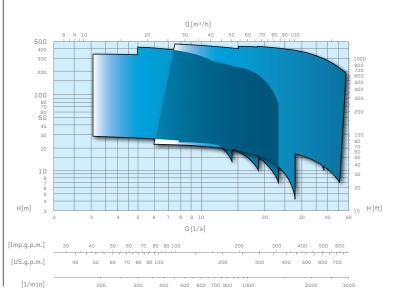




E10S - E12S - E14S E16S - E18S Electric mixed flow

Electric mixed flow borehole pumps

Electric mixed flow borehole pumps coupled with asynchronous borehole motors at 2.900 and 1.450 rpm. Tried and tested machines whose ideal use is for lifting medium flows and medium heads. These pumps are installed in wells all over the world with unanimous satisfaction of the users. Sturdy construction of cast iron, bronze or stainless steel with impellers locked on the stainless steel shaft. Their design makes them especially suited for lifting water containing sand.

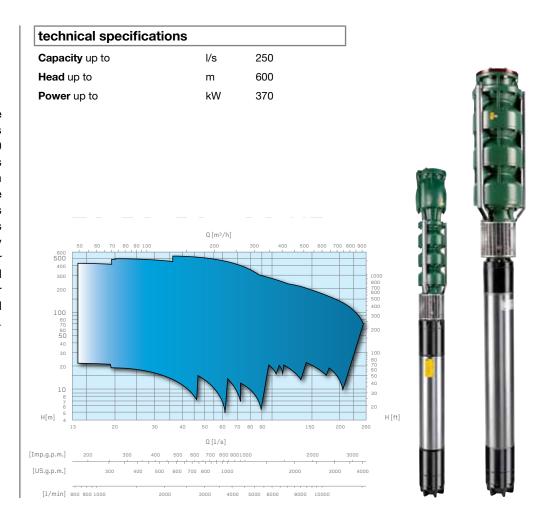


E20S - E22S Electric mixed flow borehole pumps

Electric mixed flow borehole lifting pumps that require medium-high flows.

Coupled to asynchronous borehole motors at 1.450 rpm, thanks to the low speed of rotation they ensure great reliability with low wear and a long life. Sturdy construction of cast iron, bronze or stainless steel with impellers locked on the stainless steel shaft. These electric pumps are particularly suited for continuous use in water supply, treatment systems and industrial systems in general where, besides their great reliability, energy savings play a fundamental role ensured by the excellent hydraulic efficiencies that characterise these electric pumps.

technical specifications			
Capacity up to	l/s	350	
Head up to	m	130	
Power up to	kW	240	

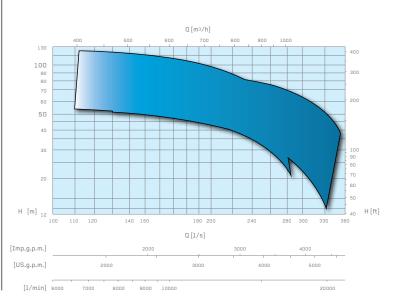





MC4 Submersible Motors

Rewindable submersible single-phase and three-phase asynchronous motors expressly designed for use with "E" Serie Pumps.

Made in 2 poles, water filled. NEMA standards for 4".

Itechnical	specifications
, coommoa.	opoomioanomo

Poles 2

 Frequency
 Hz
 50 and 60

 Power up to
 kW
 7,5





Submersible Motors

The new generation of submersible motors stands out for innovation, technology and uniqueness.

A result achieved through a steady research, with the application of the most modern methods of design integrated with the most advanced production technologies. These submersible motors guarantee very high performances, absolute reliability in heavy duty conditions of use and strong resistance to high temperatures.

technical specifications

Poles

Frequency Hz 50 and 60

Power up to kW 45

2



MAC8 - M14 Submersible Motors

Rewindable submersible threephase asynchronous motors expressly designed for use with "E" Series pumps. Made both in 2 and 4 poles, water filled NEMA standards for 8" flanged connection. A careful study of the supports and thrust-bearing devices, using the finest materials available, is an assurance of greater reliability over time. An exclusive electrical project combined with a series of specific precautions, dictated by profound experience in the field, provide incomparable operating efficiency in both deep wells and in industrial use or water supply.

Available in different construction metallurgies, they are the best solution for heavy duty conditions and professional systems.

	technical	specifications	2 Poles
П	tooi ii iioai	opcomoduomo	2 1 0100

 Frequency
 Hz
 50 and 60

 Power up to
 kW
 440

technical specifications 4 Poles

 Frequency
 Hz
 50 and 60

 Power up to
 kW
 295










BOOSTER SETS

Booster sets for electric borehole pumps made of stainless steel or galvanized steel for horizontal or vertical installations, well suited not only to new systems but also to existing pipelines.


Caprari's experience in making electric borehole pumps for every field of application has been applied to these niche installations and is the best guarantee for an optimal solution in terms of reliability, efficiency and cost-effective system operation.


A peculiar feature of the installation of electric borehole pumps in booster sets is their silent operation. This solution is therefore recommended in lifting stations near to residential areas, as an alternative to conventional surface electric pumps.

technical specification	IS		
Capacity up to	l/s	350	
Head up to	m	830	
Power up to	kW	370	

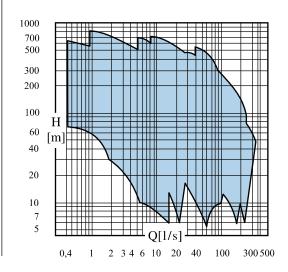



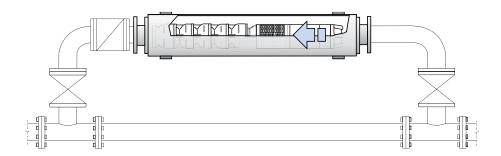




P6 ÷ P18 Vertical turbine pumps

Vertical lineshaft pumps with submerged pump bowl, lineshaft and drive unit on the surface, for installation in deep wells or tanks. Featuring an extremely solid and reliable construction design, they ensure great application flexibility. The technical characteristics and broad range of versions make this series ideal for pumping services in the sectors of water supply, industry, private and consortium irrigation and in fire-fighting systems. These machines can be controlled both by electric motors and by diesel engines and they ensure unequalled service efficiency.

Capacity up to	l/s	400
Head up to	m	250
Power up to	kW	400

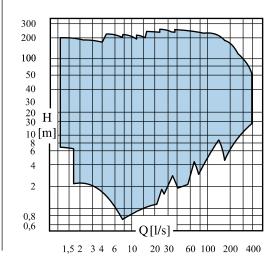

















MD

Horizontal monobloc centrifugal electric pumps

Monobloc centrifugal electric pumps with horizontal shaft, single stage with adjustable packing or mechanical seal. Made of a sturdy cast iron structure, they are coupled with 2-pole threephase asynchronous electric motors. Ideal for air-conditioning and cooling tower, water circulation, vessel supply, booster and irrigation systems.

Machines conform to 2009/125/EC Directive (EcoDesign - ErP).


technical specifications

100

40 30 20

10

Capacity up to	l/s	60
Head up to	m	85
Power up to	kW	18,5





Onergy

Vertical multistage electric pumps

The new range of vertical multistage pumps CVX series in stainless steel features suction and delivery in line and high energy efficiency motors (IE2 / IE3 Motors).

The competitive qualities of the product combined with the high quality and reliability that characterize Caprari's entire range are the more evident values of the new CVX series.


Machines conform to 2009/125/EC Directive (EcoDesign - ErP).

technical specifications

Capacity up to	l/s	12
Head up to	m	260
Power up to	kW	30

3 4 5 6 7 8 10 14 20

30 40

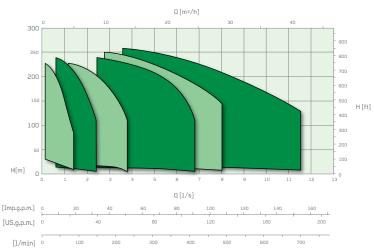




HV Vertical multistage electric pumps

Surface vertical multistage centrifugal pumps. Silent and efficient, they can be used in water supply systems, washing, fire-fighting, air-conditioning and cooling systems, in irrigation and for booster systems in general. Machines conform to 2009/125/EC Directive (EcoDesign - ErP).

technical specifications			
Capacity up to	l/s	50	
Head up to	m	250	
Power up to	kW	90	

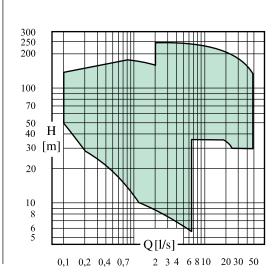



HMU Horizontal centrifugal multistage pumps

Horizontal centrifugal multistage pumps. Made with cast iron hydraulic structure and copper alloy impellers, they ensure constant performance over time and the greatest economy in power consumption. Available in a wide range, they can be coupled with both electric motors and diesel engines. They can be used in different sectors such as water supply, industrial, irrigation and fire-fighting.


technical specifications

 Capacity up to
 I/s
 26

 Head up to
 m
 280

 Power up to
 kW
 55



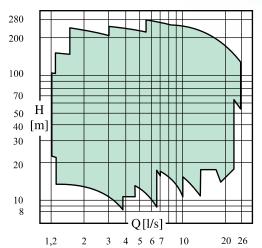


PM Horizontal centrifugal multistage pumps

Centrifugal multistage pumps for high pressure. Made of special nodular, engineering cast iron for higher pressures (100 bar) and bronze.

Double support with large sized bearings and hydraulic pressure balancing device. Available in versions with adjustable packing or mechanical seal. They ensure high performance and peak hydraulic efficiency.

The main application sectors are: water supply, fire fighting, snow making systems, irrigation and industrial applications in general.

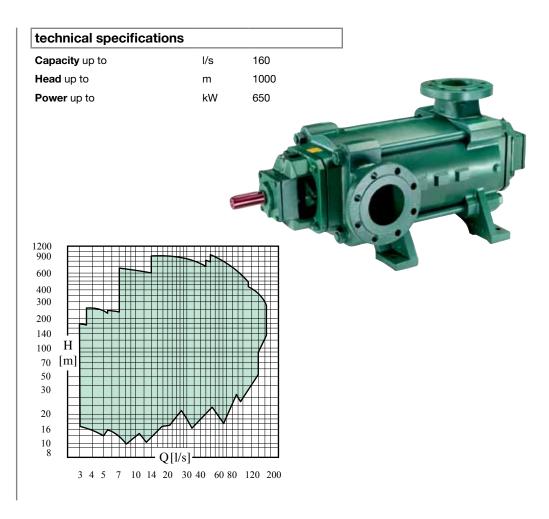

MEC A Horizontal centrifugal single stage pumps

Horizontal centrifugal single stage pumps. Made with cast iron hydraulics and steel shaft. They can be coupled to both diesel engines and electric motors with 2 and 4 poles. Both packing and mechanical seals are available. A particularly versatile pump that is used in water supply, industrial, irrigation and fire-fighting applications.

Machines conform to 2009/125/EC Directive (EcoDesign - ErP).



MEC MR Horizontal centrifugal multistage pumps

Horizontal centrifugal multistage pumps. They can be coupled to both engines and electric motors with 2 and 4 poles. Both packing and mechanical seals are available. They are suited for use in different sectors such as water supply, industrial, irrigation and fire-fighting uses and for every requirement for raising clean water.

technical specifications			
Capacity up to	l/s	100	
Head up to	m	210)
Power up to	kW	132	8
210		₩ ◀	
180			
140			
120 H			
100 [m]			
80			
60			
40			

MEC MG Flanged multistage centrifugal pumps

Horizontal centrifugal multistage pumps suitable to be flanged to diesel engines. Thanks to the compactness and sturdiness they are ideal for setting up motor pump assemblies for irrigation and fire-fighting.


The new MEC-MG HT series has been engineered to guarantee maximum reliability even when subjected to the high degree of mechanical stress produced by new generation diesel engines.

technical specifications			
Capacity up to	l/s	100	

30 40 50 60 80 100

Head up to m 185
Power up to kW 132

6 7 8 10



[lmp.g.p.m.] 200 300 400 600 8001000 [US.g.p.m.] 200 300 400 600 8001000

[l/min] 600 8001000 2000 30004000 6000

NC Standardized horizontal single stage centrifugal pumps

Single-stage horizontal centrifugal pumps conforming to DIN 24255/EN 733 standards. They are used in heating and air-conditioning systems in refrigerator plants, water supply, industry, irrigation and fire-fighting units. Version with mechanical seal and cast iron or stainless steel impeller are available. Machines conform to 2009/125/EC Directive (EcoDesign - ErP).




BHR Horizontal single stage centrifugal pumps

Horizontal centrifugal single stage pumps. They can be coupled with both electric motors with 6 and 4 poles and diesel engines.

Pumps that deliver substantial flows find their application in irrigation, fish farming and industry in general.


Machines conform to 2009/125/EC Directive (EcoDesign - ErP).

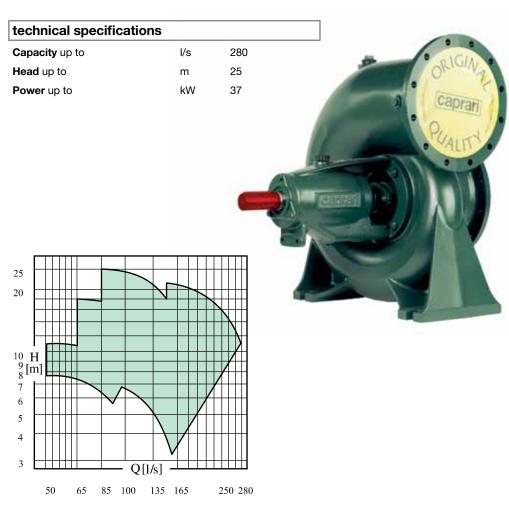



SCC Split Case

Machines providing high efficiency and excellent reliability throughout their entire life cycle against very low running costs. Ideal for heavy duty applications and continuous service. Their robust and compact structure guarantees long-lasting performance with very low maintenance and great flexibility.

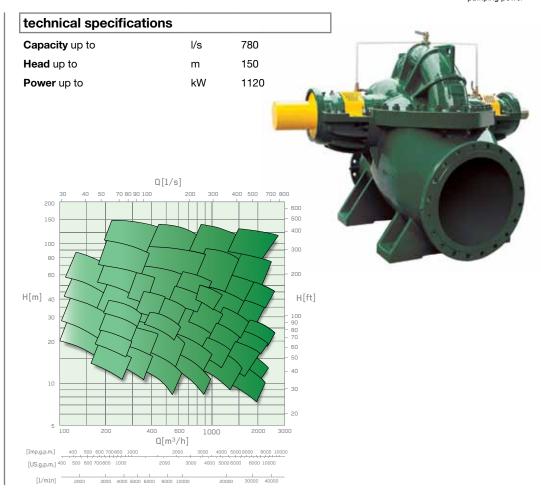

PUMPING SET

The vast production range of singlestage and multistage pumps, the possibility of operation with an electric motor and the availability of special versions on request permit offering the optimal solutions, for each use, in terms of reliability, efficiency and operating economy.

Caprari presents pumping sets assembled with motors of first class production and high efficiencies.










D Electric submersible pumps for drainage

Electric submersible pumps designed for raising drainage water, thanks to their handiness and sturdiness they are used for draining out excavations even under the harshest working conditions. Ideal for conveying clean or dirty water containing mud and sand, draining tanks and reservoirs, irrigating gardens and allotments.

technical spec	ifications
----------------	------------

Capacity up to	l/s	50
Head up to	m	40
Power up to	kW	7

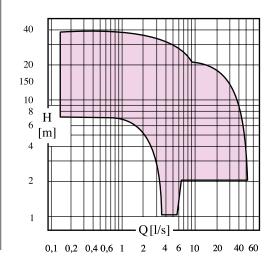




M and MAT Electric submersible pumps for dirty water

Electric submersible pumps for dirty water suited for conveying sewage water with solid matter in suspension. The models in the MAT series are equipped with a shredder for residential and industrial drainage systems. Designed for high heads and small flows, they are the ideal solution to convey residential waste water in isolated areas far from the sewer mains.

Capacity up to	l/s	17	
Head up to	m	34	
Power up to	kW	2,2	

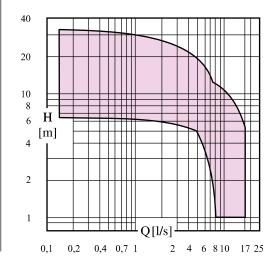




KT+ Electric submersible pumps with shredder DN 40

Electric submersible pumps with shredder for waste water. Impellers with front clearance adjustment, hardened stainless steel shredder, high efficiency low temperature motors. Ideal for raising drainage water containing solid or fibrous matter from housing estates, single dwellings, campsites, hotels, service supermarkets, farms, food preserve industries, paper industries and whenever solids in suspension must be shredded. Innovative technical solutions ensure peak hydraulic efficiency and performance with the greatest reliability. Available also in explosion proof version conforming to ATEX II 2G Exd IIB T4.

technical specifica	tions		
Capacity up to	l/s	4,7	
Head up to	m	57	
Power up to	kW	5,5	

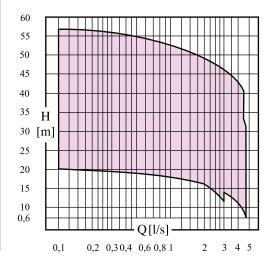






K+ Electric submersible pumps DN 65 ÷ 200

High-efficiency electric submersible pumps for raising waste water. Expressly designed for pumping residential and industrial waste, in drainage lifting stations and water treatment plants. Single-and double-channel hydraulics or with retracted open impeller, ideal to convey liquids with high concentrations of solids. Impellers with anti-clogging device, double mechanical seal for motor protection, oil chamber and conductivity probe.

High efficiency low temperature motors, for use in a dry chamber too. A modern and professional range to ensure the best results in cutting running and maintenance costs in residential and industrial systems. Available also in explosion proof version conforming to ATEX II 2G Exd IIB T4.

Capacity up to	l/s	160
Head up to	m	65
Power up to	kW	15



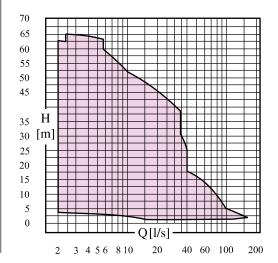







K+ Electric submersible pumps DN 100 ÷ 250

High-efficiency electric submersible pumps for raising waste water. Expressly designed for pumping residential and industrial waste, in drainage lifting stations and treatment plants.

Single- and multi-channel hydraulics or with retracted open impeller, ideal to convey liquids with high concentrations of solids. Impellers with anti-clogging device, double mechanical seal for motor protection with oil chamber and conductivity probe. High efficiency motors, also with forced cooling system for use in a dry chamber.


A modern and professional range to ensure the best results in cutting running and maintenance costs in residential and industrial treatment systems.

Available also in explosion proof version conforming to ATEX II 2G Exd IIB T4.

technical specifications

Capacity up to	l/s	300	
Head up to	m	66	
Power up to	kW	32	



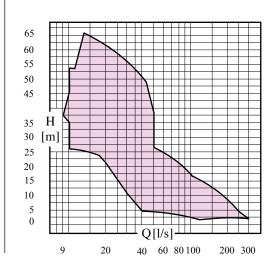



K+ Electric submersible pumps DN 150 ÷ 350


High-efficiency electric submersible pumps for raising waste water. Expressly designed for pumping residential and industrial waste, in drainage lifting stations and treatment plants.

Single- and multi-channel hydraulics, ideal to convey liquids with high concentrations of solids. Impellers with anti-clogging device, double mechanical seal for motor protection with oil chamber and conductivity probe. High efficiency motors, also with forced cooling system for use in a dry chamber. A modern and professional range to ensure the best results in cutting running and maintenance costs in residential and industrial systems.

Available also in explosion proof version conforming to ATEX II 2G Exd IIB T4.

Capacity up to	l/s	600
Head up to	m	55
Power up to	kW	62



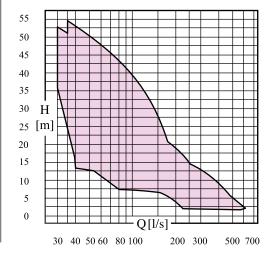



K+ Electric submersible pumps DN 250 ÷ 350


High-efficiency electric submersible pumps for raising waste water. Expressly designed for pumping residential and industrial waste, in drainage lifting stations and treatment plants.

Single- and multi-channel hydraulics, ideal to convey liquids with high concentrations of solids. Impellers with anti-clogging device, double mechanical seal for motor protection with oil chamber and conductivity probe. High efficiency motors, also with forced cooling system for use in a dry chamber. A modern and professional range to ensure the best results in cutting running and maintenance costs in residential and industrial systems.

technical specifications

Capacity up to	l/s	710	
Head up to	m	65	
Power up to	kW	180	



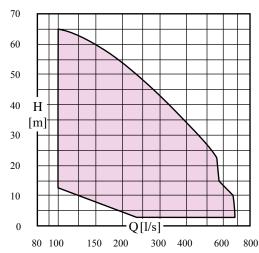




K - KOMPACT Monobloc surface electric pumps for waste water

Innovative series of surface monobloc electric pumps, in horizontal or vertical version, for pumping residential and industrial waste water, coupled with standard electric motors. Compact, reliable, versatile, with easy maintenance and installation in dry chambers. Equipped with retracted vortex high-efficiency hydraulics, single-channel or double-channel impeller. Supplied as standard with double mechanical seal on the shaft, barrier oil chamber and conductivity probe.

IE3 / IE2 Motors.

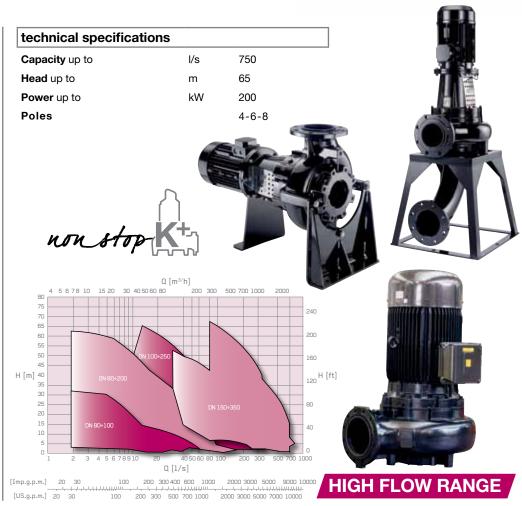




OXY FLOW Aeration assembly

Aeration assembly for processes of oxygenation and homogenization in treatment plants for residential, industrial and livestock farming waste water, in fish farming and aerated ponds. Ideal for rainwater collection basins too. Compact and simple to install, they are suitable for use in tanks of any shape and size.

technical specifications		
O ₂ output up to	kg/h	280
Water head up to	m	5,5
Power up to	kW	25

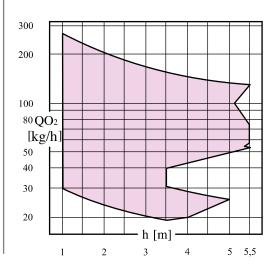




ARS - ARS/S Radial submersible aerators

Radial submersible aerators. They are an extremely flexible system of aeration, versatile and efficient in water treatment and in all cases where mixing with the addition of air is required. The machine's compactness helps installation and maintenance without draining the tanks or stopping the systems.

technical s	pecifications
-------------	---------------

O ₂ output up to	kg/h	87
Water head up to	m	6
Power up to	kW	51

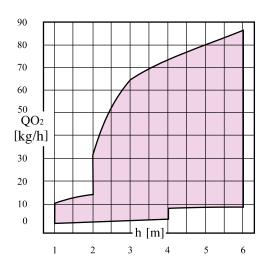





AERATION SYSTEMS

The fine bubble diffusers are the Caprari solution for the high-efficiency aeration.

Formed by the line of pipes with the diffusers installed on it, the aeration unit creates a network that covers the entire area where oxygenation is required.

Concentrations and a balanced mixture of dissolved oxygen are obtained throughout the tank by evenly distributed diffusers. They are available:

- disc diffusers
- tubular diffusers
- coarse bubble disc diffusers

technical specifications


		AFD270 9"	AFD350 12"
Recommended flow rate	Sm³/h	2,5-5,0	4,2-8,3
Flow range	Sm³/h	0-12	0-20
Active surface area	m^2	0,0375	0,065
Slit quantity		6.600	10.155



CMD (4-6 poles) Horizontal submersible mixers with direct drive

Horizontal submersible mixers with direct drive. For applications in nitrification/denitrification, sludge treatment and storage, disinfection tanks and industrial mixing. Available with cast-iron construction and stainless steel propeller or in totally stainless steel version - AISI 316. Galvanic separation system for standard components providing effective protection against corrosion.

Capacity up to	l/s	316
Axial thrust	N	429
Power up to	kW	3

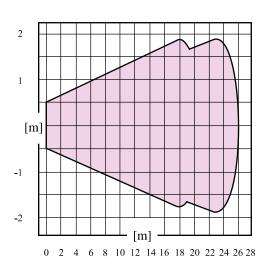








CMR

Horizontal submersible mixers with epicyclical gear

Horizontal submersible mixers with epicyclical gear between electric motor and propeller. For applications in nitrification/ denitrification, sludge treatment and storage, disinfection tanks and industrial mixing. Galvanic separation system for standard components providing effective protection against corrosion. Available also in explosion proof version conforming to ATEX II 2G Ex d IIB T5 Gb.

technical specifica	tions		
Capacity up to	l/s	1860	
Axial thrust	N	3725	
Power up to	kW	18,5	

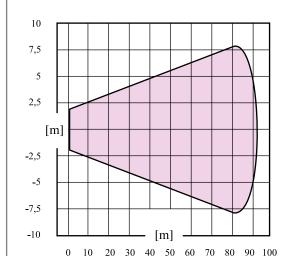



CMB

Horizontal submersible flow accelerators with epicyclical gear

Flow accelerators for applications in nitrification/denitrification tanks, disinfection and industrial mixing. Propeller with self-cleaning blades made of a composite material with high hydraulic efficiency. Galvanic separation system for standard components providing effective protection against corrosion.

Capacity up to	l/s	4890
Axial thrust	N	2900
Power up to	kW	4
8 6 4 2		
[m]		





UNIVERSAL REMOTE MANAGEMENT

Remote data management

URM, Universal Remote Management, is a complete supervisory and telecontrol system that has been specially created for fluid management and treatment. It allows the operating data of all the devices in a complex water supply system to be monitored, controlled and acquired.

Optimization of the networks and systems with consequent energy and water savings.

Thanks to its open architecture, URM can function with all protocols and can be easily installed in existing SCADA systems.

technical specifications

Versatile, modular URM control units that can be expanded to adapt to the most varied requirements



ELECTRIC PANELSControl and Monitoring

Control and protection panels for electric pumps and motors (single and threephase).

Constant pressure panels with microprocessors for one or several electric pumps, multifunction, for all installations that need pioneering systems for a sophisticated control.



VSD

Frequency converter

Thanks to a vast range of standard and optional functions, the VLT® AQUA Drive frequency converter helps to cut down on the running costs of water treatment systems by regulating the start-up speed of the machines. This prevents the flow rate from fluctuating, allowing the pressure to be kept under precise control, avoiding pressure surges

- and reducing leaks
- · energy saving
- smaller sized installations
- water pumping and treatment
- fast installation
- built-in RFI filters

technical specifications

Power supply voltage

Frequency

Temperatures up to

200 - 690 ± 10%

Hz 50 and 60



VSD Frequency converter

Cap**DRIVE** is a device that monitors and protects the pumping system, based on the pump frequency variation. Its external structure is extremely sturdy, easily cooled and small in size; it can be installed straight on to the motor's fan cover using special clips (without adding to the lateral dimension) or can be fixed to a wall with a steel bracket. Cap**DRIVE** can monitor one or two fixed-speed pumps (Direct On Line); other devices can also be connected to Cap**DRIVE** so as to create combined operating modes (up to 8 pumps in parallel).

Cap**DRIVE**



MG1 - MG2 Control monitoring and protection device for electric motors

This control, monitoring and protection device ensures that Caprari electric motors operate in the best possible way.

MotorGuard can be easily installed in the control panel and guarantees:

- lower consumption
- a more reliable installation
- longer pump life

MotorGuard
























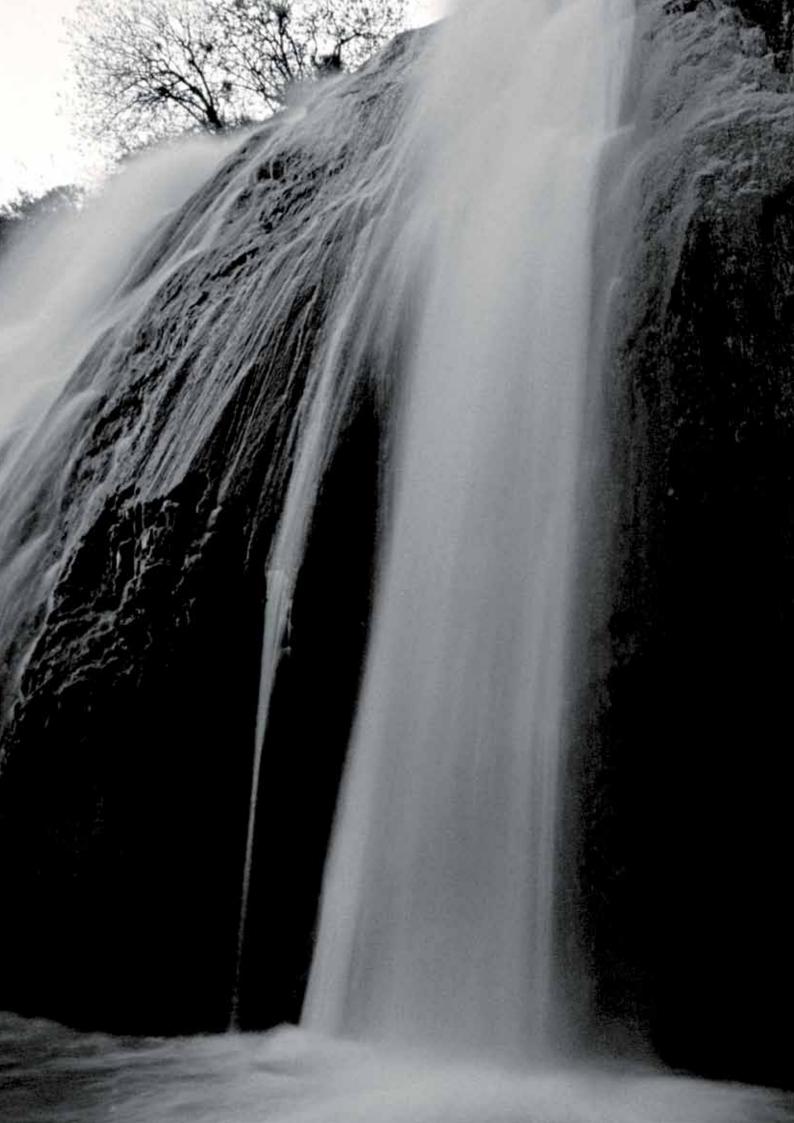

Caprari group

Caprari SpA

Via Emilia Ovest, 900 41123 Modena (Italy)

Logistic Area - Training Center Via Guido Cavani 220 41123 Modena (Italy)

Tel. +39 059 897611 Fax +39 059 897897 www.caprari.com e-mail: info@caprari.it

Milano

Via Santa Rita da Cascia, 33 20143 Milano Tel. +39 02 8138800 Fax +39 02 8139451

e-mail: filiale.milano@caprari.it

Caprari France SARL

16 Rue Claude Bernard - Z.A. Pariwest 78310 Maurepas - Paris (France)
Tel. +33 1 30139270
Fax +33 1 30139277
www.caprari.com
e-mail: contact@caprarifrance.fr

Bombas Caprari SA

C/Federico Chueca 5 - Polig. Ind. Santa Rosa 28806 Alcalá de Henares - Madrid (España) Tel. +34 91 8887653 Fax +34 91 8880326 www.bombascaprari.es

Caprari Portugal LDA

e-mail: info@bombascaprari.es

Rua Do Matadouro Regional - Lote 46 Zona Industrial 2005-002 Santarém (Portugal) Tel. +351 243 350610 Fax +351 243 350619 www.caprari.com e-mail: geral@caprariportugal.pt

Caprari Pumps (UK) LTD

Caprari House - Bakewell Road - Orton Southgate Peterborough PE2 6XU (United Kingdom) Tel. +44 1733 371605 Fax +44 1733 371607 www.caprari.co.uk e-mail: info@caprari.co.uk

Caprari Pumpen GmbH

Kleemanngasse 15
D-90765 Fürth - Bayern (Germany)
Tel. +49 911 610930
Fax +49 911 6109349
www.caprari.de
e-mail: caprari@caprari.de

Caprari Pumps Australia Pty Ltd.

3 Jeanes Street
Beverley SA - 5009 (Australia)
Box 159 Woodville Sa 5011
Tel. +61 8 8244 4442
Fax +61 8 8244 4462
www.caprari.com
e-mail: sales@caprari.com.au

Caprari Pumps New Zealand

21 Livingstone Street,
Phillipstown, Christchurch, 8011 (New Zealand)
PO Box 33467 Barrington, Christchurch 8244
Tel. +64 3 451 1939
Fax +64 3 451 1939
www.caprari.com
e-mail: sales@caprari.com.au

Caprari Hellas SA

Industrial Area of Sindos Municipality of Ehedorou 57022 Thessaloniki (Greece) Tel. +30 2310 797967 Fax +30 2310 797968 www.caprari.gr e-mail: info@caprari.gr

Caprari Tunisie SA

Rue Annaba - Z. Ind.elle Ben Arous 2013 Ben Arous (Tunisie) Tel. +216 79 390001 Fax +216 79 390044 www.caprari.com e-mail: tunisie@caprari.com

Caprari Pumps Yemen LTD

Head Office - North Rawdha P.O. Box: 2145 Sana'a (Republic of Yemen) Tel. +967 1 344631/344632 Fax +967 1 344633 www.caprari.com

S.M. Baghanem & Saudi Caprari Pumps Factory LTD

Jeddah Industrial Area - P.O. Box: 181216 King Fahd Street - Al Kandarah 21415 Jeddah (Kingdom of Saudi Arabia) Tel. +966 2 6081434/6436275 Fax +966 2 6439258 www.caprarl.com

Caprari Pumps (Shanghai) Co. Ltd.

No. 8, Lane 123 Tongfa Road, Laogang Industrial Park, Nanhui District, 201302 Shanghai (P.R.C.) Tel. +8621 6829 6060 Fax +8621 6829 6068 www.caprari.com e-mail: shanghai@caprari.com

Fondmatic SpA

Via Degli Orsi 518
40014 Crevalcore - Bologna (Italy)
Tel. +39 051 982567
Fax +39 051 983287
www.fondmatic.it
e-mail: fondmatic@fondmatic.it

